


Характеристики

МОДЕЛ Трифазен 400 V / 50 Hz	Номинална мощност P2		Осово натовар- ване N	Обороти min-1	Пусков ток	КПД η	Фактор на мощността $\cos \phi$	Номинален коэффициент Nm	Пусков коэффициент	h mm	Тегло kg
	kW	HP			Номинален ток				Номинален коэффициент		
6PD / 5.5	4	5.5	10000	2840	5.1	74%	0.86	13.5	1.65	595	33.4
6PD / 7.5	5.5	7.5		2840	5.1	74%	0.84	18.5	1.60	625	36.5
6PD / 10	7.5	10		2850	4.7	78%	0.83	25.1	1.55	660	37.8
6PD / 12.5	9.2	12.5		2880	4.5	81%	0.77	30.5	1.60	700	42.6
6PD / 15	11	15		2850	5.2	85%	0.82	36.9	2.20	765	51.8
6PD / 20	15	20		2840	5.0	82%	0.86	50.5	2.60	820	58.0
6PD / 25	18.5	25		2850	5.9	84%	0.84	62.0	2.30	883	62.8
6PD / 30	22	30	20000	2850	5.5	84%	0.83	73.8	2.45	953	79.4
6PD / 40	30	40		2860	5.5	85%	0.83	100.2	1.90	1098	92.1
6PD / 50	37	50		2840	5.1	84%	0.83	124.5	2.10	1233	92.0

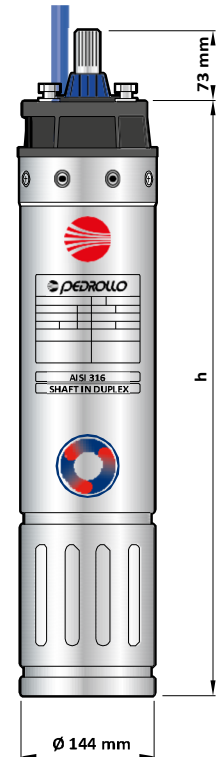

КОНСУМАЦИЯ

МОДЕЛ	НАПРЕЖЕНИЕ
Трифазен	400 V
6PD / 5.5	9.3 A
6PD / 7.5	12.9 A
6PD / 10	17.1 A
6PD / 12.5	21.8 A
6PD / 15	23.8 A
6PD / 20	31.6 A
6PD / 25	39.0 A
6PD / 30	46.5 A
6PD / 40	63.5 A
6PD / 50	78.0 A