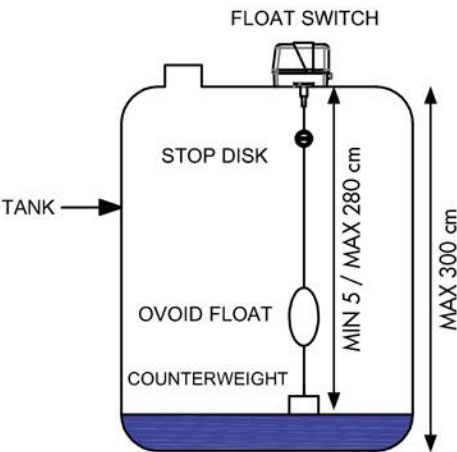
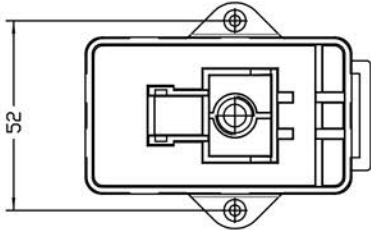
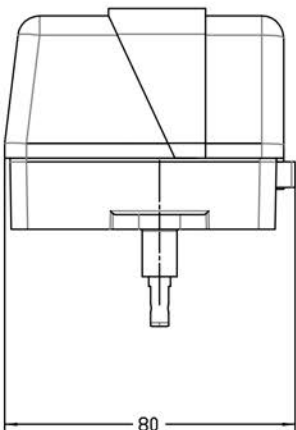
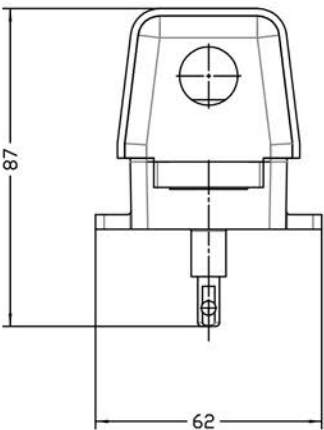


CARATTERISTICHE TECNICHE / SPECIFICATIONS

Temperatura di esercizio / Operating temperature / Température de service	50 °C
Temperatura di stoccaggio / Storage temperature / Température de stockage	-20 ÷ 80 °C
Tensione di esercizio / Operating voltage / Tension de service / Tension de service	230 V a.c.
Tensione massima di commutazione / Max switching voltage / Tension max de commutation	250 V a.c.
Frequenza / Frequency / Fréquence	50 - 60 Hz
Corrente con carico resistivo / Current with resistive load / Courant avec charge résistive	10 A
Corrente con carico induttivo / Current with inductive load / Courant avec charge inductive	4 A
Portata microinterruttore / Microswitch capacity / Capacité électrique micro-interrupteur	16 A
Grado di protezione / Protection level / Niveau de protection	IP 56
Corpo del galleggiante in materiale atossico / Floating body in non - toxic material / Corps en matériau antistatique	
Corda in polipropilene / Polypropylene rope / Corde en polypropylène	3 mt.