



# 6SR36 – 6SR44

ELETTROPOMPE SOMMERSE DA 6"

## 6SR 36

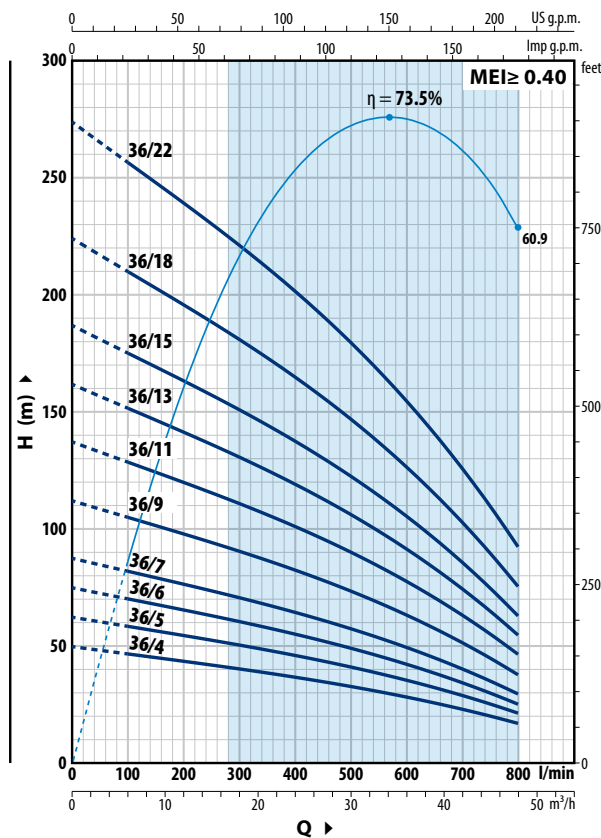

## 6SR 44

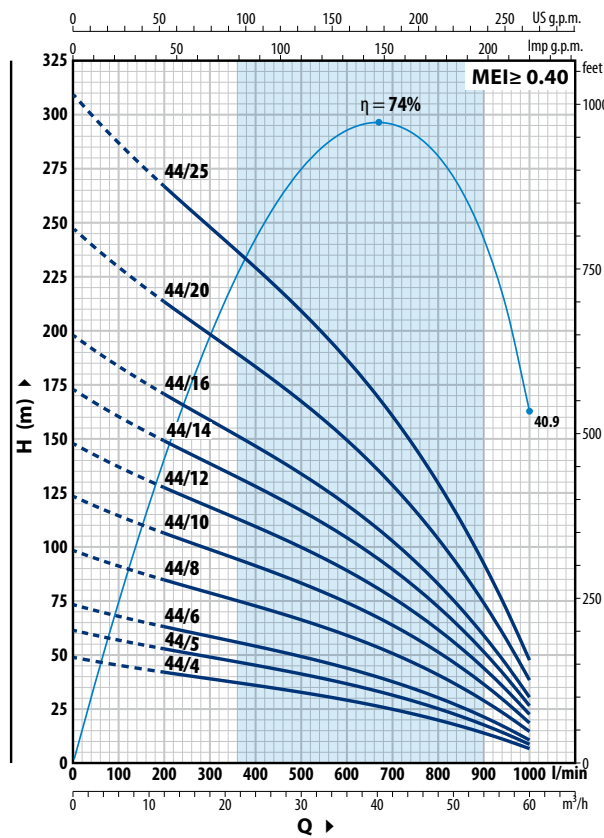

## 6SR 36

| TIPO                    | POTENZA (P <sub>2</sub> ) |      | Q       |       |      |      |      |      |      |      |      |      |      |
|-------------------------|---------------------------|------|---------|-------|------|------|------|------|------|------|------|------|------|
|                         | kW                        | HP   |         | m³/h  | 0    | 6    | 12   | 18   | 24   | 30   | 36   | 42   | 48   |
| Trifase                 |                           |      |         | l/min | 0    | 100  | 200  | 300  | 400  | 500  | 600  | 700  | 800  |
| 6SR 36/4 <sup>(1)</sup> | 4                         | 5.5  | H metri |       | 50   | 46.5 | 43.5 | 40   | 36.5 | 32.5 | 28   | 22.9 | 17   |
| 6SR 36/5                | 5.5                       | 7.5  |         |       | 62.5 | 58.5 | 54.5 | 50.5 | 46   | 41   | 35   | 28.5 | 21   |
| 6SR 36/6                | 5.5                       | 7.5  |         |       | 75   | 70   | 65.5 | 60.5 | 55   | 49   | 42   | 34.5 | 25   |
| 6SR 36/7                | 7.5                       | 10   |         |       | 87   | 82   | 76   | 70   | 64   | 57   | 49   | 40   | 29.5 |
| 6SR 36/9                | 9.2                       | 12.5 |         |       | 112  | 105  | 98   | 91   | 83   | 74   | 63.5 | 51.5 | 37.5 |
| 6SR 36/11               | 11                        | 15   |         |       | 137  | 128  | 120  | 111  | 101  | 90   | 77   | 63   | 46   |
| 6SR 36/13               | 13                        | 17.5 |         |       | 162  | 152  | 142  | 131  | 119  | 106  | 91   | 74.5 | 54.5 |
| 6SR 36/15               | 15                        | 20   |         |       | 187  | 175  | 163  | 151  | 138  | 123  | 105  | 86   | 63   |
| 6SR 36/18               | 18.5                      | 25   |         |       | 224  | 210  | 196  | 181  | 165  | 147  | 127  | 103  | 75   |
| 6SR 36/22               | 22                        | 30   |         |       | 274  | 257  | 239  | 221  | 202  | 180  | 155  | 126  | 92   |

## 6SR 44

| TIPO                     | POTENZA (P <sub>2</sub> ) |      | Q       | m³/h  | 0    | 200  | 300  | 400 | 500  | 600  | 700  | 800  | 900  | 1000 |
|--------------------------|---------------------------|------|---------|-------|------|------|------|-----|------|------|------|------|------|------|
| Trifase                  | kW                        | HP   |         | l/min | 0    | 12   | 18   | 24  | 30   | 36   | 42   | 48   | 54   | 60   |
| 6SR 44/4 <sup>(1)</sup>  | 4                         | 5.5  | H metri |       | 49.5 | 43   | 40   | 37  | 33.5 | 30   | 25.8 | 20.9 | 14.9 | 8    |
| 6SR 44/5                 | 5.5                       | 7.5  |         |       | 62   | 53.5 | 49.5 | 46  | 42   | 37.5 | 32.5 | 26.1 | 18.7 | 10   |
| 6SR 44/6                 | 7.5                       | 10   |         |       | 74   | 64   | 59.5 | 55  | 50.5 | 45   | 38.5 | 31.5 | 22.4 | 11.5 |
| 6SR 44/8                 | 9.2                       | 12.5 |         |       | 99   | 86   | 80   | 74  | 67   | 60   | 51.5 | 41.5 | 30   | 15.5 |
| 6SR 44/10                | 11                        | 15   |         |       | 124  | 107  | 99   | 92  | 84   | 75   | 64.5 | 52   | 37.5 | 19.5 |
| 6SR 44/12 <sup>(2)</sup> | 13                        | 17.5 |         |       | 149  | 128  | 119  | 110 | 101  | 90   | 77   | 62.5 | 45   | 23.5 |
| 6SR44/14                 | 15                        | 20   |         |       | 174  | 150  | 139  | 129 | 118  | 105  | 90   | 73   | 52.5 | 27.5 |
| 6SR 44/16                | 18.5                      | 25   |         |       | 198  | 171  | 159  | 147 | 134  | 120  | 103  | 83   | 59.5 | 31   |
| 6SR 44/20                | 22                        | 30   |         |       | 248  | 214  | 199  | 184 | 168  | 150  | 129  | 104  | 75   | 39   |
| 6SR 44/25                | 30                        | 40   |         |       | 310  | 267  | 249  | 230 | 210  | 188  | 161  | 130  | 93   | 49   |

Q = Portata H = Prevalenza manometrica totale

Tolleranza delle curve di prestazione secondo EN ISO 9906 Grado 3B.

(1) Per elettropompe equipaggiate con motore 6PSR: motore da 7.5 HP

(2) Per elettropompe equipaggiate con motore 6PD: motore da 20 HP